


## PROPORTIONAL PRESSURE RELIEF VALVES, PILOT OPERATED, WITH INTEGRATED ELECTRONICS AND PRESSURE CLOSED LOOP

### SUBPLATE MOUNTING

p max 350 barQ max (see table of performances)

### **OPERATING PRINCIPLE**




- PRE\*J\* valves are proportional pressure relief valves, pilot operated, with integrated electronics and pressure closed loop, with mounting interface in compliance with ISO 6264 standard.
- These valves are used to control hydraulic circuit pressure and enable the use of the full flow rate of the pump, even with settings approaching calibrated values.
- The two-stage design and wide passages ensure reduced pressure drops thereby improving the system energy performance
- They are fitted with a manual pressure relief valve which is factory set to ≥15% of the maximum value in the pressure control range.
- Valves are available with different types of electronics, with analogue or fieldbus interfaces.
- They are available in three sizes with flow rates up to 500 l/min and in four pressure control ranges up to 350 bar.
- The valves are easy to install. The driver directly manages digital settings.

### **PERFORMANCES**

(obtained with mineral oil with viscosity of 36 cSt at 50°C and p = 140 bar)

		PRE10J*	PRE25J*	PRE32J*
Maximum operating pressure	bar	350		
Maximum flow	l/min	200	400	500
Step response		see	e paragrap	h 8
Hysteresis	% of p nom		< 1%	
Repeatability	% of p nom	< ± 0,5%		
Electrical characteristic		see paragraph 3		
Ambient temperature range	°C	-20 / +60		
Fluid temperature range	°C	-20 / +80		
Fluid viscosity range cSt 10 ÷ 400				
Fluid contamination degree	Accor	ccording to ISO 4406:1999 class 18/16/13		
Recommended viscosity	cSt	25		
Mass	kg	5,5	6,3	8,5

### **HYDRAULIC SYMBOL**




81 331/120 ED 1/16




#### 1 - IDENTIFICATION CODE

### 1.1 - Standard electronics

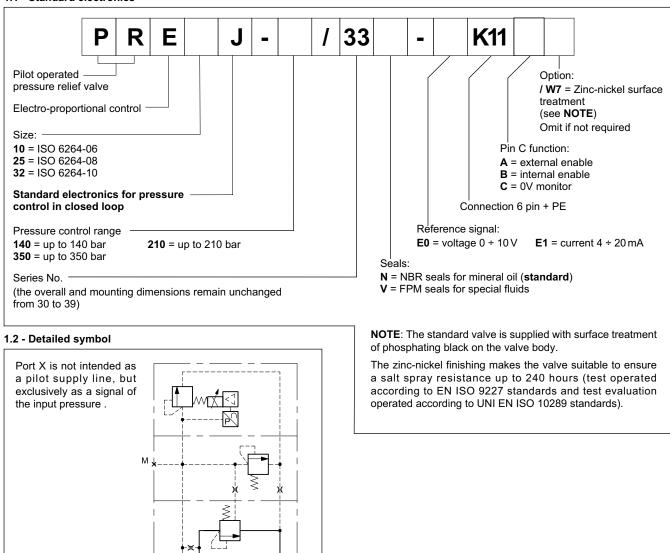


### 1.3 - Compact electronics

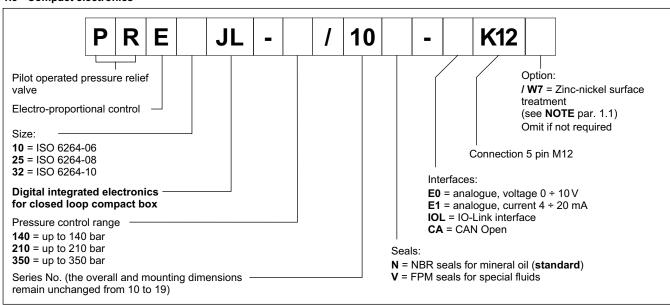


81 331/120 ED **2/16** 



### 1.4 - Electronics with fieldbus communication

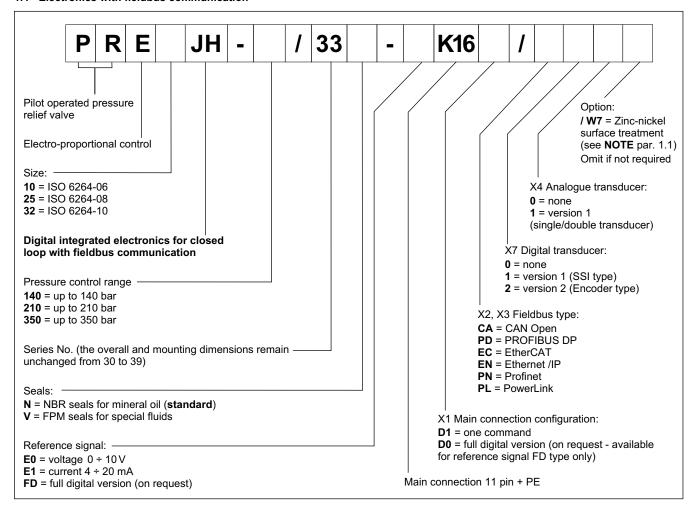

### 2 - COMPARISON AMONG INTEGRATED ELECTRONICS

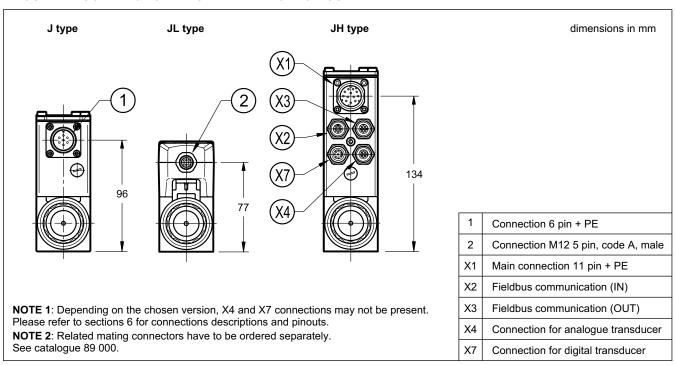

81 331/120 ED 3/16



### 3 - ELECTRONICS COMMON DATA

Duty cycle		100% (continuous operation)
Protection class according to EN 60529		IP65 / IP67
Supply voltage	V DC	24 (from 19 to 30 VDC), ripple max 3 Vpp
Power consumption	VA	25
Maximum solenoid current	А	1.88
Fuse protection, external	Α	2A time lag
Managed breakdowns		Overload and electronics overheating, cable breakdown, supply voltage failures
Electromagnetic compatibility (EMC) emissions EN 61000-6-4, immunity EN 61000-6-2		According to 2014/30/EU standards


### 4 - PRE\*J - STANDARD ELECTRONICS

#### 4.1 - Electrical characteristics


Command signal:	voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ri = 11 kOhm) 4 ÷ 20 (Impedance Ri = 58 Ohm)
Monitor signal (pressur	re at transducer): voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ro > 1 kOhm) 4 ÷ 20 (Impedance Ro = 500 Ohm)
Communication for dia	gnostic		LIN-bus Interface (by means of the optional kit)
Connection			6 pin + PE (MIL-C-5015-G - DIN EN 175201-804)

### 3.2 - On-board electronics diagrams


### VERSION A - External Enable

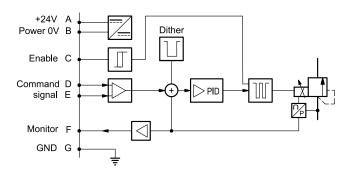

### **VERSION B** - Internal Enable



### VERSION C - 0V Monitor





81 331/120 ED 4/16



### 4.3 - Version with voltage command (E0)

The reference signal is between 0 ÷ 10V. The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.




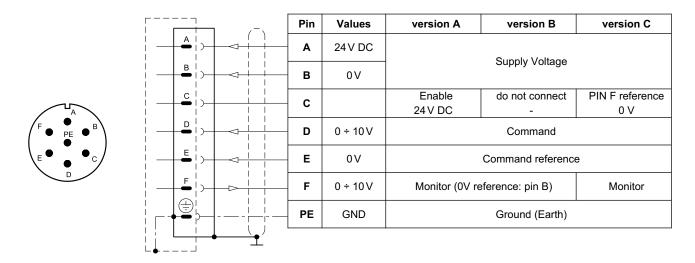


### 4.4 - Version with current command (E1)

The reference signal is supplied in current 4 ÷ 20 mA. If the current for command is lower, the card shows a breakdown cable error. To reset the error is sufficient to restore the signal.

The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.



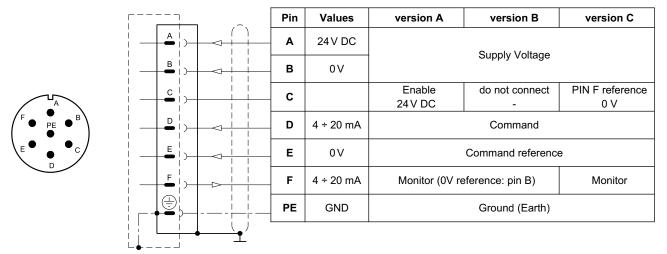

81 331/120 ED 5/16

### 5 - PRE\*JL - COMPACT ELECTRONICS

In versions 'IOL' and 'CA' pin 3 and pin 5 are galvanic isolated up to 100 V to avoid earth loops. In IO-Link networks, the length of the connecting cables is limited to 20 metres.


### 5.1 - Electrical characteristics

Command signal:	voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ri = 11 kOhm) 4 ÷ 20 (Impedance Ri = 58 Ohm)
Monitor signal (pressure	at transducer): voltage (E0) current (E1)	V DC mA	0 ÷ 5 (Impedance Ro > 1 kOhm) 4 ÷ 20 (Impedance Ro = 500 Ohm)
IO-Link communication ( Data rate	IOL):	kBaud	IO-Link Port Class B 230.4
Can Open communication  Data rate	on (CA):	kbit	10 ÷ 1000
Data register (IOL and C	A versions only)		solenoid voltage supply, solenoid faults (shortcircuit, bad config, internal), box temperature, switch-on time, vibrations
Connection			5 pin M12 code A (IEC 61076-2-101)

### 5.2 - Pin tables

### 'E0' connection



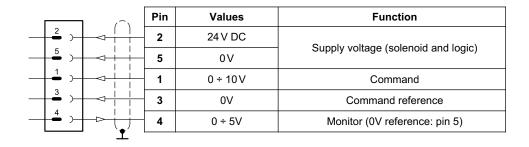

### 'E1' connection



.~.	Pin	Values	Function
2 )	2	24 V DC	Supply voltage (solenoid and logic)
5 )	5	0 V	Supply voltage (solenoid and logic)
1 )	1	4 ÷ 20 mA	Command
3	3	0V	Command reference
4 )	4	4 ÷ 20 mA	Monitor (0V reference: pin 5)
<u> </u>			

### 'IOL' connection



	Pin		Values	Function
2	2	2L+	24 V DC	Supply of the power stage
5	5	2L-	0 V (GND)	Internal galvanic isolation from PIN 3
1 )	1	1L+	+24 V DC	IO Link ounnly valtage
3 )   1	3	1L-	0V (GND)	IO-Link supply voltage
4 )	4	C/Q		IO-Link Communication
<u> </u>				

### 'CA' connection



	Pin	Values	Function
1 )	1	CAN_SH	Shield
2	2	24 V DC	O mark marks and
3	3	0 V (GND)	Supply voltage
4 ) 4	4	CAN H	Bus line (high)
5	5	CAN_L	Bus line (low)

81 331/120 ED 6/16



### 6 - PRE\*JH - FIELDBUS ELECTRONICS


The 11+ PE pin connection allows separate supply voltage for electronics and solenoids.

Command - valve position schemes as for the standard electronics. Please refer to pictures in par. 4.3 and 4.4.

### 6.1 - Electrical characteristics

Command signal:	voltage (E0) current (E1) digital (FD)	V DC mA	0 ÷ 10 (Impedance Ri = 11 kOhm) 4 ÷ 20 (Impedance Ri = 58 Ohm) via fieldbus
Monitor signal (pressure a	at transducer): voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ro > 1 kOhm) 4 ÷ 20 (Impedance Ro = 500 Ohm)
Communication / diagnostic			via Bus register
Communication interface CAN Open PROFIBUS DP EtherCAT, Etherr	standards net /IP, Profinet, PowerLink		EN 50325-4 + DS408 EN 50170-2 / IEC 61158 IEC 61158
Communication physical CAN Open PROFIBUS DP EtherCAT, Etherr	layer net /IP, Profinet, PowerLink		optical insulated CAN ISO 11898 optical insulated RS485 fast ethernet, insulated 100 Base TX
Power connection			11 pin + PE (DIN 43651)

### 6.2 - X1 Main connection pin table



### D1: one command

	_	(-)	Pin	Values	Function
1	<del></del>		1	24 V DC	Mala and bandlana
2	$\rightarrow$	+ +	2	0 V	Main supply voltage
3	<b>\</b>	<u>i i</u>	3	24V DC	Enable
4	)—		4	0 ÷ 10 V (E0) 4 ÷ 20 (E1)	Command
5	<b>\</b>		5	0 V	Command reference signal
6	)		6	0 ÷ 10 V (E0) 4 ÷ 20 (E1)	Monitor (0V reference pin 10)
7			7	NC	do not connect
8			8	NC	do not connect
9		 <del>     </del>	9	24 V DC	Laste and anatost assessed
10	)	<del>                                     </del>	10	0 V	Logic and control supply
11	)		11	24 V DC	Fault (0V DC) or normal working (24V DC) (0V reference pin 2)
	-	<del>                                     </del>	12	GND	Ground (Earth)
<b>-</b>		1			

### D0: full digital

Pin	Values	Function
1	24 V DC	Main aupply valtage
2	0 V	Main supply voltage
3	24V DC	Enable
4	NC	do not connect
5	NC	do not connect
6	NC	do not connect
7	NC	do not connect
8	NC	do not connect
9	24 V DC	Logic and central cumply
10	0 V	Logic and control supply
11	24 V DC	Fault (0V DC) or normal working (24V DC) (0V ref. pin 2)
12	GND	Ground (Earth)

81 331/120 ED **7/16** 



### 6.3 - FIELDBUS connections

Please wire following guidelines provided by the relative standards communication protocol.

### 6.3.1 - Communication connection CA (CAN Open)

X2 (IN) connection: M12 A 5 pin female



Pin	Values	Function
1	CAN_SH	Shield
2	NC	Do not connect
3	GND	Signal zero for data line
4	CAN_H	Bus line (high)
5	CAN_L	Bus line (low)

X3 (OUT) connection: M12 A 5 pin male



Pin	Values	Function
1	CAN_SH	Shield
2	NC	Do not connect
3	GND	Signal zero for data line
4	CAN_H	Bus line (high)
5	CAN_L	Bus line (low)

### 6.3.2 - Communication connection PD (PROFIBUS DP)

X2 (IN) connection: M12 B 5 pin male (IN)



Pin	Values	Function	
1	+5 V	Termination signal supply	
<b>2</b> PB_A		Bus line (high)	
3	0 V	Signal zero for data line and termination	
4	PB_B	Bus line (low)	
5	SHIELD		

X3 (OUT) connection: M12 B 5 pin female

X3 (OUT) connection: M12 D 4 pin female



Pin Values		Function	
1	+5 V	Termination signal supply	
2	PB_A	Bus line (high)	
3 0V		Signal zero for data line and termination	
4 PB_B Bus lin		Bus line (low)	
5	SHIELD		

### 6.3.3 - Communication connections: EC (EtherCat), EN (Ethernet/IP), PN (PROFINET), PL (POWERLINK)

X2 (IN) connection M12 D 4 pin female



Pin	Values	Function
1	TX+	Transmitter
2	RX+	Receiver
3	TX-	Transmitter
4	RX-	Receiver
HOUSING	shield	




Pin	Values	Function
1	TX+	Transmitter
2	RX+	Receiver
3	TX-	Transmitter
4	RX-	Receiver
HOUSING	shield	

81 331/120 ED **8/16** 




## **6.4 - Digital transducer connection X7 connection**: M12 A 8 pin female

### **VERSION 1: SSI type**

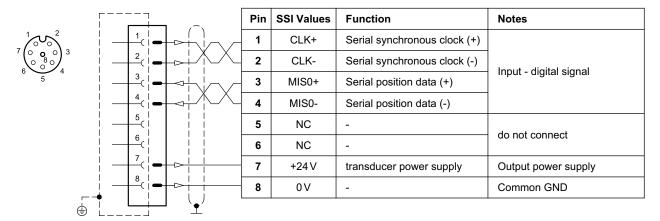

### **VERSION 2: ENCODER type**

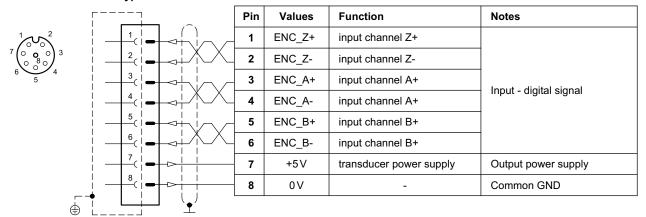


### 6.5 - Analogue transducer connection

X4 connection: M12 A 4 pin female

### VERSION 1: single / double transducer

(single or double is a software-selectable option)

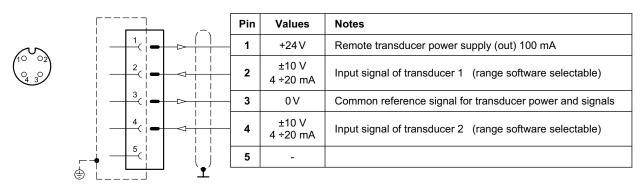


81 331/120 ED 9/16



### 7 - CHARACTERISTIC CURVES

(measured with viscosity of 36 cSt at 50°C)

Typical control characteristics, according to the reference signal for available pressure control ranges, measured with input flow rate Q = 50 l/min. Characteristic curves measured without backpressure in T, with linearity and hysteresis compensation set by the onboard electronics.




### MINIMUM CONTROLLED PRESSURE p min = f (Q)

### ∆p [bar] PRE10J PRE32J PRE25J 15 12 9 6 3 0 0 100 200 300 500 400 Q [l/min]

minimum controlled pressure for pressure control ranges between 140 bar and 350 bar.


### PRESSURE VARIATION p max = f (Q)



### 8 - STEP RESPONSE

(obtained with mineral oil with viscosity of 36 cSt at  $50^{\circ}$ C )

Response times obtained with PRE\*J\*-210 valves, with an input flow rate of 50 l/min and a pressure oil volume of 2 litres. The response time is affected both by the flow rate and the oil volume in the pipework.

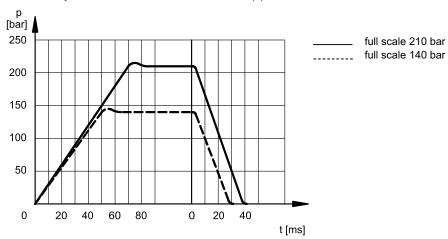



81 331/120 ED 10/16




### 9 - OVERALL AND MOUNTING DIMENSIONS PRE10J\*


dimensions in mm








### PRE10JL



**NOTE 1**: at the first start up, or after a long period of no use, it is necessary to vent the air through the breather (2) placed at the end of the solenoid tube.

NOTE 2: Mounting interface at par. 12.

### PRE10JH



- 1 Mounting surface with sealing rings: 2 OR type 123 (17.86x2.62) - 90 Shore 1 OR type 109 (9.13x2.62) - 90 Shore
- 2 Breather: Allen key 4
- 3 Factory-set pressure relief valve
- 4 Main connection 6 pin + PE
- 5 Mating connector
  To be ordered separately.
  See catalogue 89 000

Valve fastening: 4 SHCS M12x40 - ISO 4762

Torque: 69 Nm (viti A8.8)


Thread of mounting holes: M12x20


81 331/120 ED 11/16




### 10 - OVERALL AND MOUNTING DIMENSIONS PRE25J\*


dimensions in mm








### PRE25JL



**NOTE 1**: at the first start up, or after a long period of no use, it is necessary to vent the air through the breather (2) placed at the end of the solenoid tube.

**NOTE 2**: Mounting interface at par. 12.

### PRE25JH



2 OR type 3118 (29.82x2.62) - 90 Shore 1 OR type 109 (9.13x2.62) - 90 Shore 2 Breather: Allen key 4 3 Factory-set pressure relief valve

Mounting surface with sealing rings:

- 4 Main connection 6 pin + PE
- 5 Mating connector
  To be ordered separately.
  See catalogue 89 000


Valve fastening: 4 SHCS M16x60 - ISO 4762

Torque: 170 Nm (viti A8.8)

Thread of mounting holes: M16x25

81 331/120 ED 12/16



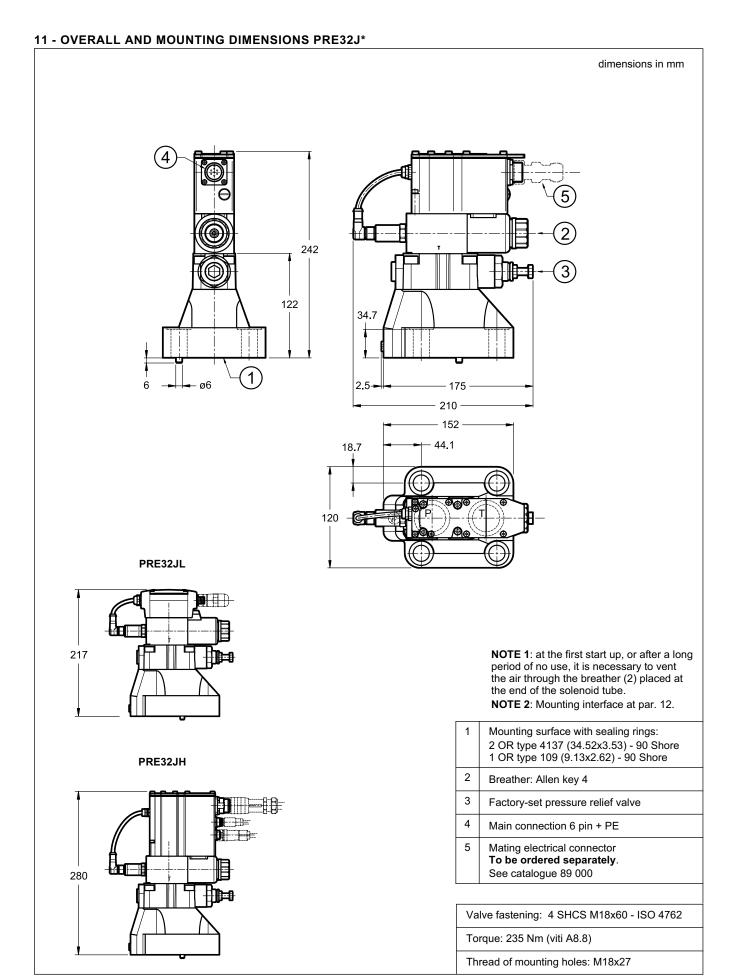


81 331/120 ED 13/16



### **12 - MOUNTING INTERFACES**


#### PRE10J\*:

ISO 6264-06-09-\*-97 (CETOP 4.4.2-2-R06-350)




#### PRE25J\*:

ISO 6264-08-13-\*-97 (CETOP 4.4.2-2-R08-350)



### PRE32J\*:

ISO 6264-10-17-\*-97 (CETOP 4.4.2-2-R10-350)



13 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

81 331/120 ED 14/16



#### 14 - INSTALLATION


We recommend to install the valves either in horizontal position, or vertical position with the solenoid downward. If the valve is installed in vertical position and with the solenoid upward, you must consider possible variations of the minimum controlled pressure, if compared to what is indicated in paragraph 7.

Ensure that there is no air in the hydraulic circuit. In particular applications, can be necessary to vent the air entrapped in the solenoid tube, by using the appropriate drain screw in the solenoid tube.

Ensure the solenoid tube is always filled with oil. At the end of the operation, make sure of having correctly replaced the drain screw. Connect the valve T port directly to the tank.

Add any backpressure value detected in the T line to the controlled pressure value. Maximum admissible backpressure in the T line, under operational conditions, is 2 bar.

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed, fluid can easily leak between the valve and support surface.



### 15 - ACCESSORIES

(to be ordered separately)

### 15.1 - Mating connectors

Mating connectors must be ordered separately. See catalogue 89 000.



For K11 and K16 versions we recommend the choice of a metal connector to avoid electromagnetic disturbances and to comply with EMC regulations on electromagnetic compatibility. If you opt for a plastic connector, make sure that it guarantees and maintains the IP and EMC protection characteristics of the valve.

### 15.2 - Mating connectors for fieldbus communication and for sensors.

Duplomatic offers spare parts to be wired and also ready-to-use cord sets. Please refer to cat. 89 000.

### 15.3 - Connection cable

The optimal wiring provides for 7 isolated conductors, with separate screen for the signal wires (command, monitor) and an overall screen.

Cross section for power supply:

- up to 20 m cable length: 1,0 mm<sup>2</sup>
- up to 40 m cable length: 1,5 mm<sup>2</sup> (IO-Link excluded)

Cross section for signals (command, monitor):

- 0,50 mm<sup>2</sup>

### 15.4 - Kit for start-up LINPC-USB

Device for service start-up and diagnostic, available for valves with K11 and K16 connection, see catalogue 89 850.

### 16 - SUBPLATES

(see catalogue 51 000)

	PRE10J*	PRE25J*	PRE32J*
Туре	PMRQ3-Al4G rear ports	PMRQ5-Al5G rear ports	PMRQ7-AI7G rear ports
P, T port dimensions	P: 1/2" BSP T: 3/4" BSP	1" BSP	1" 1/4 BSP
X port dimensions	1/4" BSP	1/4" BSP	1/4" BSP

81 331/120 ED 15/16

D



### DUPLOMATIC MS S.p.A.

via M. Re Depaolini 24 • 20015 PARABIAGO (MI) • ITALY tel. +39 0331.895.111 • www.duplomatic.com • e-mail: sales.exp@duplomatic.com